





Hemlock Blind Rivets

Manufacturer: RivetFast

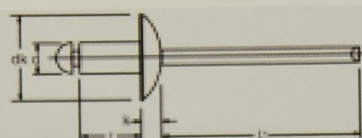

GB 12618

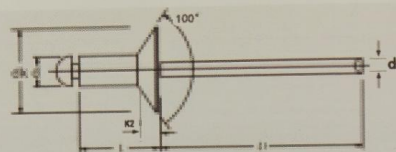

Materials

Body

Stainless Steel

Body

Steel

d	l +1/-0	K Max	dk Max	dm Max	Hole Size	L1 Min	Grip Range	Shear Strength (N)	Tensile Strength (N)	Part_Number
4.8(3/16")	9.0	2.50	10.20	3.40	4.9-5.1	27	1.50-3.50	4500	3500	SSH48090
4.8(3/16")	11.5	2.50	10.20	3.40	4.9-5.1	27	3.50-6.00	6000	3500	SSH48115
4.8(3/16")	14.0	2.50	10.20	3.40	4.9-5.1	27	6.00-8.50	6200	3500	SSH48140
4.8(3/16")	16.5	2.50	10.20	3.40	4.9-5.1	27	8.50-11.00	6200	3500	SSH48165
4.8(3/16")	19.0	2.50	10.20	3.40	4.9-5.1	27	11.00-13.50	6200	3500	SSH48190
6.4(1/4")	9.0	3.50	13.40	4.20	6.6-6.8	27	1.50-3.50	6800	6400	SSH64090
6.4(1/4")	10.5	3.50	13.40	4.20	6.6-6.8	27	2.00-4.50	9200	6400	SSH64105
6.4(1/4")	12.5	3.50	13.40	4.20	6.6-6.8	27	3.50-6.50	10000	6400	SSH64125
6.4(1/4")	14.5	3.50	13.40	4.20	6.6-6.8	27	5.50-8.50	10000	6400	SSH64145
6.4(1/4")	16.5	3.50	13.40	4.20	6.6-6.8	27	7.50-10.50	11000	6400	SSH64165
6.4(1/4")	18.5	3.50	13.40	4.20	6.6-6.8	27	9.50-12.50	11000	6400	SSH64185
6.4(1/4")	20.5	3.50	13.40	4.20	6.6-6.8	27	11.00-14.00	11000	6400	SSH64205
6.4(1/4")	22.5	3.50	13.40	4.20	6.6-6.8	27	13.00-16.00	11000	6400	SSH64225
6.4(1/4")	24.5	3.50	13.40	4.20	6.6-6.8	27	14.50-18.00	11000	6400	SSH64245
6.4(1/4")	26.5	3.50	13.40	4.20	6.6-6.8	27	16.50-20.00	11000	6400	SSH64265
6.4(1/4")	28.5	3.50	13.40	4.20	6.6-6.8	27	18.50-22.00	11000	6400	SSH64285
6.4(1/4")	30.5	3.50	13.40	4.20	6.6-6.8	27	20.50-24.00	11000	6400	SSH64305
6.4(1/4")	32.5	3.50	13.40	4.20	6.6-6.8	27	22.50-26.00	11000	6400	SSH64325
7.8(5/16")	13.5	4.20	18.00	5.20	8.1-8.3	27	4.00-7.00	13500	9100	SSH78135
7.8(5/16")	16.5	4.20	18.00	5.20	8.1-8.3	27	7.00-10.00	16000	9100	SSH78165
7.8(5/16")	19.5	4.20	18.00	5.20	8.1-8.3	27	10.00-13.00	16000	9100	SSH78195
7.8(5/16")	22.5	4.20	18.00	5.20	8.1-8.3	27	13.00-16.00	16000	9100	SSH78225

d	l +1/-0	K Max	dk Max	dm Max	Hole Size	L1 Min	Grip Range	Shear Strength (N)	Tensile Strength (N)	Part_Number
6.4(1/4")	11.5	2.50	10.20	4.20	6.6-6.8	27	3.00-5.50	5200	5400	SSHC64115
6.4(1/4")	13.5	2.50	10.20	4.20	6.6-6.8	27	4.50-7.50	7200	5400	SSHC64135
6.4(1/4")	15.5	2.50	10.20	4.20	6.6-6.8	27	6.50-9.50	9200	5400	SSHC64155
6.4(1/4")	17.5	2.50	10.20	4.20	6.6-6.8	27	8.50-11.50	9200	5400	SSHC64175
6.4(1/4")	19.5	2.50	10.20	4.20	6.6-6.8	27	10.00-13.00	10000	5400	SSHC64195
6.4(1/4")	21.5	2.50	10.20	4.20	6.6-6.8	27	12.00-15.00	10000	5400	SSHC64215
6.4(1/4")	23.5	2.50	10.20	4.20	6.6-6.8	27	14.00-17.00	10000	5400	SSHC64235
6.4(1/4")	25.5	2.50	10.20	4.20	6.6-6.8	27	15.50-19.00	10000	5400	SSHC64255
6.4(1/4")	27.5	2.50	10.20	4.20	6.6-6.8	27	17.50-21.00	10000	5400	SSHC64275
6.4(1/4")	29.5	2.50	10.20	4.20	6.6-6.8	27	19.50-23.00	10000	5400	SSHC64295

Note: Dimensions in mm unless stated otherwise (strength values in N). Shear/tensile strength values are typical reference figures — refer to actual test reports for critical applications. Other diameters, lengths or materials (e.g. aluminum, copper) available on request — please contact our sales team.